



 *available*

NOTICE

- This product is not intended for life or safety applications.
- Do not install this product in hazardous or classified locations.
- Read and understand the instructions before installing this product.
- Turn off all power supplying equipment before working on it.
- The installer is responsible for conformance to all applicable codes.

No responsibility is assumed by Veris Industries for any consequences arising out of the use of this material.

Product Identification

| | <i>Local Display</i> | <i>NIST</i> | <i>Operational Range</i> ¹ | <i>US or EU</i> |
|----|-----------------------------------|--------------------------|---|-------------------------------------|
| PW | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | L = LCD Display X = No Display | N = NIST X = None | 03 = 0-50 psig 04 = 0-100 psig 05 = 0-250 psig 06 = 0-3.5 barg ² 07 = 0-7.0 barg ² 08 = 0-17 barg ² | S = Standard ³ C = CE |

¹ Select operational range according to maximum gauge pressure, NOT differential pressure.

Example: High gauge pressure=90 psig, Select 100 psig model (04).

² barg models use BSPT threads on sensor fittings.

³ Not available with barg units.

Specifications

| | |
|--------------------------------------|---|
| Media Compatibility | 17-4 PH stainless steel |
| Input Power | 12 to 30VDC, 24VAC nom. |
| Maximum Current Draw | DC: 125mA; AC: 280mA |
| Output | 3-wire transmitter; user-selectable 4-20mA/0-5V/0-10V ¹ |
| Status Indication | Dual color LED |
| Proof Pressure | 2x max. F.S. range |
| Burst Pressure | 5x max. F.S. range |
| Accuracy at 25°C² | Ranges A, B, C: ±1% F.S. ³ Range D: ±2% F.S. ³ |
| Surge Damping | Electronic; 5-second averaging |
| Temperature Compensated Range | 0° to 50°C (32° to 122°F); TC Zero <1.5% of product F.S. per sensor; TC Span <1.5% of product F.S. per sensor |
| Sensor Operating Range | -20° to 85°C (-4° to 185°F) |
| Operating Environment | -10° to 55°C (14° to 131°F); 10-90% RH noncondensing |
| Long Term Stability | ±0.25% |
| Zero Adjust | Pushbutton auto-zero and digital input (2-position terminal block) |
| Fittings | psig models: 1/8" NPT female thread, stainless steel 17-4 PH barg models: 1/8" BSPT female thread, stainless steel 17-4 PH |
| Physical | White powder-coated aluminum |
| PRESSURE RANGES | |
| 0-50 psig | 5/10/25/50 psid |
| 0-100 psig | 10/20/50/100 psid |
| 0-250 psig | 25/50/125/250 psid |
| 0-3.5 barg | 0.35/0.7/1.75/3.5 bard |
| 0-7.0 barg | 0.7/1.4/3.5/7.0 bard |
| 0-17 barg | 1.7/3.4/8.5/17.0 bard |


To conform to EMC Standards, use shielded cabling. Technical information is available from the factory on request or on our website (www.veris.com/ce)

¹ Minimum input voltage for 4-20 mA operation: 250 Ω loop (1-5V) = 12 VDC; 500 Ω loop (2-10V) = 15 VDC
Minimum input voltage for volt operation: 0-5 VDC output = 12 VDC; 0-10 VDC output = 15 VDC

² Accuracy combines linearity, hysteresis, and repeatability.

³ F.S. is defined as full span of selected range in bidirectional mode.

Dimensions

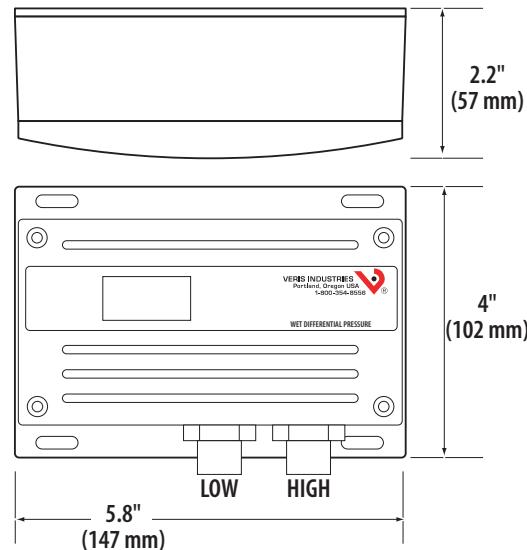


Installation



Observe precautions for handling static sensitive devices to avoid damage to the circuitry that is not covered under the factory warranty.

1. Find a suitable mounting position near the location to be measured. Mount the PW housing using the self-tapping screws provided.
2. Remove the lid from the housing to reveal the board. Wire the PW terminals to the power source and to the digital control system as shown. Configure the jumpers for desired operating parameters. Replace the cover.

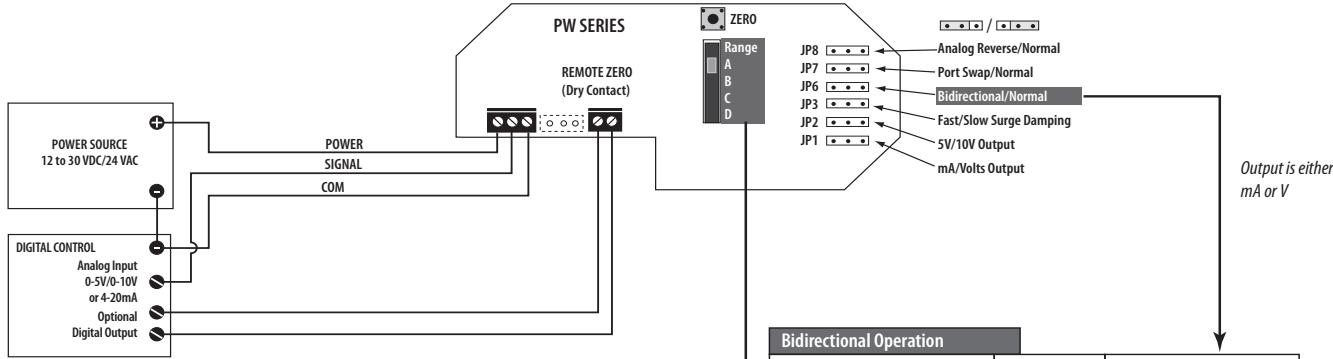

| Jumper | Options | Notes |
|--------|-----------------------------|---|
| JP1 | Voltage (V) or Current (mA) | |
| JP2 | 0-10V or 0-5V output span | Use only if JP1 is set to V mode. |
| JP3 | Slow or Fast | Slow mode provides 5 second averaging for surge damping. |
| JP6 | Normal or Bidirectional | Normal: 0 to F.S. pressure Bidirectional: -F.S. pressure to +F.S. pressure; output reads 1/2 when pressure is zero. |
| JP7 | Normal or Port Swap | Reverses polarity of the pressure ports (i.e. makes the LO port operate as the HI port and vice versa); used when the sensor is incorrectly plumbed. |
| JP8 | Normal or Analog Reverse | Normal: output increases as pressure increases; Reverse: output is maximum when pressure differential is zero and decreases as pressure increases. |

Bidirectional Operation

| Input Conditions | | Result | Outputs Read | |
|------------------|----------|-----------|--------------|-------|
| HI PORT | LO PORT | DP | 4-20mA | 0-10V |
| 100 psi | 0 psi | +100 psi | 20mA | 10V |
| 100 psi | 50 psi | +50 psi | 16mA | 7.5V |
| 50 psi | 50 psi | 0 psi | 12mA | 5V |
| 50 psi | 100 psi | -50 psi | 8mA | 2.5V |
| 0 psi | 100 psi | -100 psi | 4mA | 0V |
| 17.0 bar | 0 bar | +17.0 bar | 20mA | 10V |
| 17.0 bar | 8.5 bar | +8.5 bar | 16mA | 7.5V |
| 8.5 bar | 8.5 bar | 0 bar | 12mA | 5V |
| 8.5 bar | 17.0 bar | -8.5 bar | 8mA | 2.5V |
| 0 bar | 17.0 bar | -17.0 bar | 4mA | 0V |

Use the Range switch to select F.S. differential pressure.

| Model | Range (psi) | | | |
|-------|-------------|-----|----|----|
| | A | B | C | D |
| PW-03 | 50 | 25 | 10 | 5 |
| PW-04 | 100 | 50 | 20 | 10 |
| PW-05 | 250 | 125 | 50 | 25 |


e.g. PW-04

| Model | Range (bar) | | | |
|-------|-------------|------|-----|------|
| | A | B | C | D |
| PW-06 | 3.5 | 1.75 | 0.7 | 0.35 |
| PW-07 | 7.0 | 3.5 | 1.4 | 0.7 |
| PW-08 | 17.0 | 8.5 | 3.4 | 1.7 |

e.g. PW-08

Installation (cont.)

3. Connect tubing to the high and low ports on the PW.



4. Connect the other ends of the tubing to a pipe or duct, across the pump, filter, or other pressure differential.

Notes

During operation, the LCD shows two pressure values. The value adjacent to the PSID label shows the differential pressure, while the value adjacent to the PSIG label shows the high port gauge pressure. The gauge pressure value is read from the high port if JP7 is in the Normal position. If this jumper is in the Port Swap position, the PSIG value is read from the low port, and the value is usually a negative number.

This product uses a half-wave rectifier power supply. If the installer is using a transformer to power the device, do not use the same transformer to power other devices utilizing non-isolated full-wave power supplies.

Optional: Connect the Zero terminals to the digital output (contact closure) of the control system. The Zero input is for dry-contact only. Do not apply voltage to the Zero terminals.

To use the auto zero function, press and hold the Zero button for 2 seconds or provide contact closure on the auxiliary 'Remote Zero' terminal to reset the output to zero pressure. To protect the device from accidental zeroing, this feature is only enabled when the detected pressure is within 5% of factory calibration.

LED Blink Codes

| LED Color | Status |
|----------------|---|
| Solid Green | Normal operation. |
| Flashing Green | Low > High; use port swap jumper or bidirectional mode. |
| Solid Red | Differential pressure is too high; select a higher pressure range. |
| Flashing Red | Gauge pressure over sensor range; reduce line pressure or replace with a higher range device. |