

FLUKE®

Distributed by:
Valuetesters.com
sales@valuetesters.com
Tel: 602-795-8292, Fax: 602-795-4624


Fluke 707Ex Intrinsically Safe Loop Calibrator

The fast, one-handed tool for loop checks in Ex zones

Technical Data

The 707Ex is an intrinsically safe loop calibrator for use in explosion endangered areas. The Fluke 707Ex is certified in accordance with the ATEX directive (Ex II 2 G Ex ia IIC T4) in Zones 1 and 2. The 707Ex is also certified to operate in accordance with Factory Mutual N.I. Class 1, Division 2 areas Group A-D. The 707Ex features:

- Large display and simple, quick-click push rotary button for easy one-handed operation.
- Simultaneous mA and % readout for quick, easy, interpretation of readings.
- mA accuracy of 0.015 %, superior to other loop calibrators.
- Push button with 25 % steps for fast, easy linearity checks.
- 0-100 % "span check" for fast confirmation of zero and span.
- Selectable slow ramp, fast ramp, and step ramp to provide smooth outputs for valve slewing and loop functional tests.
- Internal loop supply, so you can power and read a transmitter at the same time without carrying a DMM.
- Measures V dc to 28 V.
- Innovative output adjustment dial with .001 mA and 0.1 mA resolution.
- HART® compatible resistance is connected in series with the loop supply for compatibility with HART communicators.

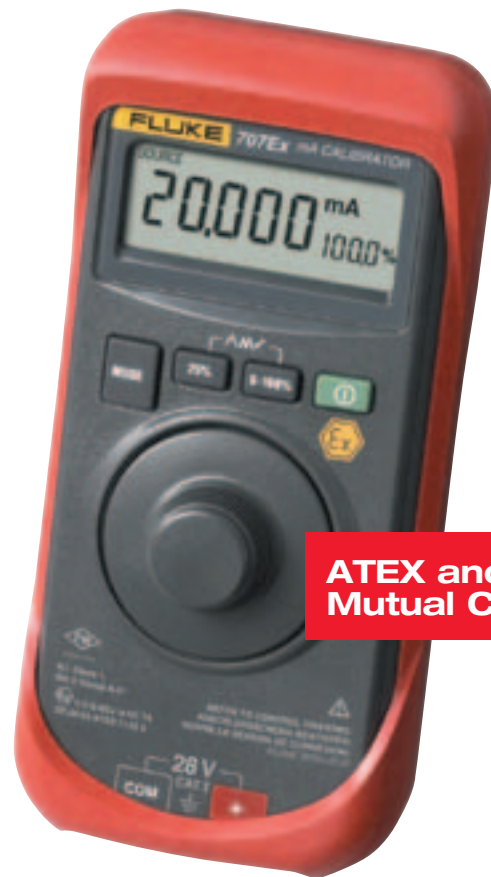

ATEX and Factory Mutual Certified

Summary Specifications (18 °C to 28 °C, one year)

| Function | Range | Resolution | Accuracy |
|-----------------|-------------------------|------------|----------------------------|
| Voltage measure | 0 to 28 V | 0.001 V | ± (0.015 % Rdg + 2 counts) |
| mA measure | 0 to 24 mA | 0.001 mA | ± (0.015 % Rdg + 2 LSD) |
| mA source | 0 to 24 mA ¹ | 0.001 mA | ± (0.015 % Rdg + 2 LSD) |
| mA simulate | 0 to 24 mA ² | 0.001 mA | ± (0.015 % Rdg + 2 LSD) |
| Loop supply | 24 V dc | n/a | 24 V ± 1 V dc, no load |

Temperature Coefficient, -10 to 18 °C, 28 to 55 °C, ± .005 % of range per °C;

¹Max load, 700 Ohms at 20 mA

²Max applied voltage for simulation, 28 V

General Specifications

Maximum voltage: 28 volts
Non-operating temperature: -30 to 60 °C
Operating temperature: -10 to 50 °C
Relative humidity: 0 to 95 % (0 to 30 °C); 0 to 75 % (30 to 40 °C); 45 % up to 50 °C
Operating altitude: 3,000 meters max.
Shock and vibration: Per MIL-T-28800 for a Class 2 Instrument
Safety: CSA C22.2 No. 1010.1: 1992
EMC: EN50082-1:1992 and EN55022:1994 Class B
ATEX certification: Ex II 2 G Ex ia IIC T4 Zones 1 and 2, ZELM O2 ATEX O120 X
FM certification: N.I. Class 1, Division 2, Groups A-D
CE certification: EN61010-1 and EN61326
Size, without holster: (H x W x D)
 6.0 in x 2.8 in x 1.6 in
 (152 mm x 70 mm x 41 mm)
Size, with holster: (H x W x D)
 6.4 in x 2.9 in x 1.9 in
 (164 mm x 75 mm x 47 mm)
Weight: 0.28 kg (0.6 lb), with holster and stand:
 .92 lb (0.42 kg)
Battery: One 9 V alkaline
Battery life: 18 hours typical, at 12 mA into 500 ohms
Warranty: 1 year

Operating Modes

Measure current
 Measure current/Loop power
 Measure voltage
 Simulate current; manual adjust; scroll up/down
 Simulate current; 25% steps; 0 - 100% steps
 Simulate current; Auto ramp (smooth/step)
 Source current; manual adjust; scroll up/down
 Source current; 25% steps; 0 - 100% steps
 Source current; Auto ramp (smooth/step)

Ordering information

Model

Fluke-707Ex Intrinsically Safe Loop Calibrator

Each calibrator includes:
 Safety designed test leads, alligator test clips, holster, instruction manual on CD (English, French, German, Spanish, Italian, Dutch, Norwegian, Danish, Swedish, Finnish, Portuguese, Korean, Chinese, Japanese), 707Ex CCD Content Control Drawing, CE, CSA, FM and ATEX markings.

Fluke. *Keeping your world up and running.*®

Fluke Corporation
 PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Europe B.V.
 PO Box 1186, 5602 BD Eindhoven, The Netherlands

For more information call:
 In the U.S.A. (800) 443-5853 or Fax (425) 446-5116
 In Europe/M-East/Africa +31 (0) 40 2675 200 or Fax +31 (0) 40 2675 222
 In Canada (800)-36-FLUKE or Fax (905) 890-6866
 From other countries +1 (425) 446-5500 or Fax +1 (425) 446-5116
 Web access: <http://www.fluke.com>

©2003-2010 Fluke Corporation.
 Specifications subject to change without notice.
 Printed in U.S.A. 7/2010 2072174B D-EN-N

Modification of this document is not permitted without written permission from Fluke Corporation.

Distributed by:
 **Valuetesters.com**
 sales@valuetesters.com
 Tel: 602-795-8292, Fax: 602-795-4624