

SKIPPER^{plus}


moisture meter for boats




Distributed by:
Valuetesters.com
sales@valuetesters.com
Tel: 602-795-8292, Fax: 602-795-4624

OSMOSIS IN GRP

Osmosis, also known as Gelcoat Blistering, is found in GRP hulls when moisture soaks into the hull surface, collects between the glassfibre and plastic laminate, resulting in blistering of the gelcoat. Usually found on or below the waterline, Osmosis dramatically reduces the structural strength of the hull and the value of a boat.



The Skipper Plus non-destructive moisture meter provides a complete, safe method for detecting excess moisture in GRP and wooden boats. A pocket-sized meter, the Skipper is designed to locate moisture in boat hulls and fittings.

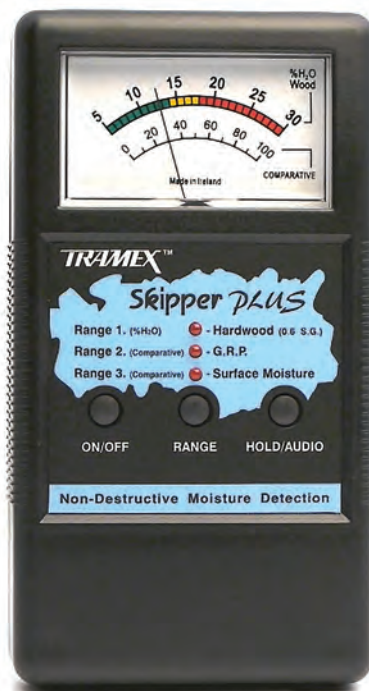

Code Produit : SMP

FEATURES

- Three ranges for detecting moisture in GRP and hardwood.
- Wide range of readings for wood of 5% to 30% on hardwood scale and 0 to 100 on comparative scale for GRP and other materials.
- Identifies the presence of osmosis in GRP hulls.
- Confirms if wooden boats are dry enough for painting or varnishing.
- Trace deck and bulkhead leaks.
- “Hold” function facilitates ease of recording readings
- Soft rubber electrodes make direct contact without scratching.
- High moisture audio warning tone that can be switched on or off.
- Battery operated (included)



www.tramexmeters.com

TRAMEX - U.S.A. and Canada
Black Hawk Sales Inc., 4901 Fox Ridge Court, Fort Collins, CO 80524
Tel: 970 488 1898, Fax: 877 525 9279, Email: sales@tramexmeters.com

PRODUCT DESIGN

The Skipper Plus operates on the principal of non-destructive impedance measurement. Coplanar electrodes are fitted on the base of the instrument from which low frequency signals are transmitted into the material being tested measuring the change in impedance caused by the presence of moisture. This reading is translated by the instrument into a moisture content reading.

THE SKIPPER PLUS MOISTURE METER IS USED FOR:

- Early detection before blistering appears.
- Identifying the affected area.
- Monitoring hull during de-humidification and repairs.
- Checking stripped or peeled areas for dryness prior to re-coating.

To achieve a lasting finish and strength of wooden boats and boat parts it is essential to ensure that they are well maintained and do not contain excess moisture. Excess moisture can rot and decay the wood itself.

SPECIFICATIONS


Size:	6" x 3.5" x 1.5" (150mm x 85mm x 38mm)
Weight:	7.7oz (220g)
Construction:	ABS Body
Power:	9 volt PP3 Battery (included)
Display:	Analog
Depth of penetration:	up to 1 1/4" (30mm)

MEASURING RANGE

Wood Moisture Content:	5 to 30 %
Reference scale	0 to 100

Distributed by:
Valuetesters.com
sales@valuetesters.com
Tel: 602-795-8292, Fax: 602-795-4624

HOW IT WORKS

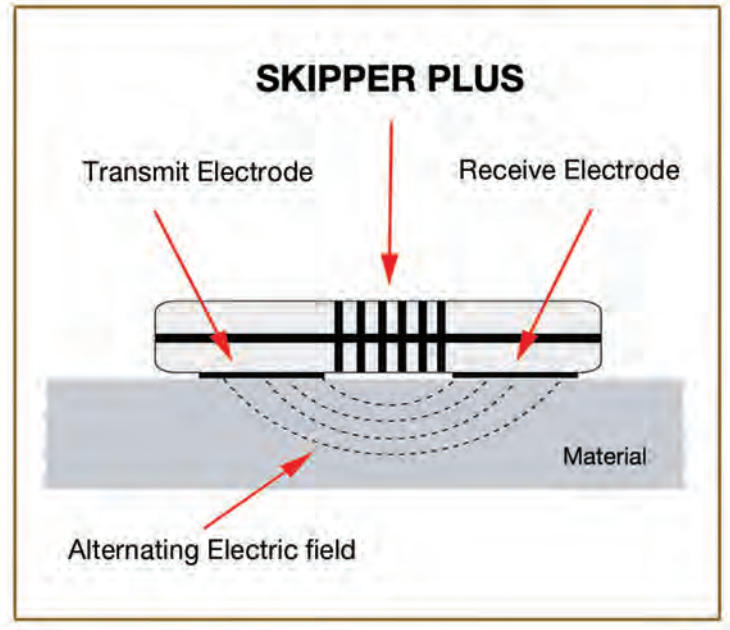

MOISTURE IN WOOD

Moisture can cause peeling and blistering of applied finishes and treatments, newly applied finishes can fail prematurely if the wood it is applied to is not sufficiently dry. Hidden or trapped moisture can lead to mold and biological growth. The Skipper Plus can be moved across the surface of the boat to moisture survey in a fast and thorough manner, detecting moisture non-destructively through paint and coatings on wood up to a depth of 1.25" (30mm). The Skipper Plus can also be used to detect leaks and trace them to source both above and below decks.

