

## CFR data logger system

**testo 190 – highly efficient  
validation of sterilization and  
freeze-drying processes**

---

1-click report: full, audit-relevant documentation  
with just the click of a mouse

---

Reduction of processing time with full compliance

---

Acceptance criterion:

No problem meeting "10% failure rate"

---

21 CFR Part 11-compliant software:

provides both novices and experts with optimum support  
for measuring processes

---



°C

bar

Its innovative design makes the testo 190 CFR data logger system the modern solution for the validation of sterilization and freeze-drying processes. The loggers' battery can be changed quickly and safely without tools. This speeds up your processes enormously – and after the change, the loggers remain 100% tight. The system comprises four temperature loggers and one pressure logger with rigid and flexible probes, a multifunction case with integrated programming and readout units, as well as 21 CFR Part 11-compliant software.

The battery can be freely combined with all testo 190 data loggers. The user-friendly testo 190 CFR software and the special readout units in the case allow up to 8 data loggers to be read out and programmed simultaneously.


## Overview of the system components



**The CFR data loggers** come in four temperature and one pressure models. They stand for robustness, durability and reliability. The thread means batteries can be safely changed in just a few seconds without any tools. Thanks to the logger's hermetically sealed design, it remains 100% tight even after the battery has been changed.



**The multifunction case** for the testo 190 completes the system. It is robust, smart and practical, not only providing storage for the data loggers, but also enabling configuration and readout. A programming and readout unit is installed in every case. This means that up to 8 data loggers can be configured and read out simultaneously.

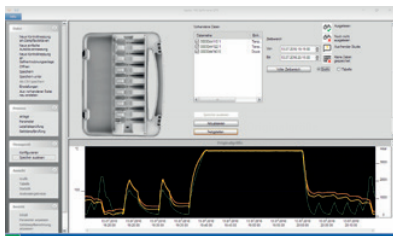

**The data loggers are programmed and read out** using the intuitive testo 190 CFR software. No data export is needed for data analysis (e.g. in Excel). 1-click report means that full, audit-relevant documentation can be achieved with just one click of a mouse. 21 CFR Part 11-compliant of course. It is possible to read out a total of up to 254 loggers in one validation process.

## Ordering data

### testo 190-T1

testo 190-T1, CFR temperature data logger, including battery and adapter for testo 190 programming and readout unit.


Order no. 0572 1901



### testo 190-T2

testo 190-T2, CFR temperature data logger, including battery and adapter for testo 190 programming and readout unit.

Order no. 0572 1902



### testo 190-T3

testo 190-T3, CFR temperature data logger, including battery and adapter for testo 190 programming and readout unit.

Order no. 0572 1903



### testo 190-T4

testo 190-T4, CFR temperature data logger, including battery, adapter for testo 190 programming and readout unit and thread extension.

Order no. 0572 1904



### testo 190-P1

testo 190-P1, CFR pressure data logger, including battery.

Order no. 0572 1900



### testo 190 CFR software

21 CFR Part 11-compliant software for configuration and readout of testo 190 data loggers. System requirements: Windows 7 (32/64 bit), Windows 8, Windows 10.

Order no. 0554 1901



### testo 190 small case

testo 190 small case, case for transport, storage, configuration and readout of testo 190 CFR data loggers. Including USB cable and 1 programming and readout unit for a maximum of 8 data loggers. Dimensions: 340 x 265 x 60 mm.

Order no. 0516 1901



## Technical data / accessories

| CFR data loggers                             | testo 190-T1                                              | testo 190-T2 | testo 190-T3       | testo 190-T4       | testo 190-P1                     |
|----------------------------------------------|-----------------------------------------------------------|--------------|--------------------|--------------------|----------------------------------|
| Measurement parameter / probe type           | Temperature (Pt1000)                                      |              |                    |                    | Pressure (piezoresistive sensor) |
| Measuring range                              | -50 to +140°C                                             |              |                    |                    | 1 mbar to 4 bar abs.             |
| Accuracy                                     | ±0,2 °C (-50 to -40 °C)<br>±0,1 °C (-40 to +140 °C)       |              |                    |                    | ± 20 mbar                        |
| Resolution                                   | 0.01°C                                                    |              |                    |                    | 1 mbar                           |
| Reading memory                               | 60,000 readings                                           |              |                    | 30,000 per channel | 60,000 readings                  |
| Measuring cycle                              | 1 s to 24 h                                               |              |                    |                    |                                  |
| Operating temperature/<br>operating pressure | -50 to +140 °C<br>1 mbar to 4 bar                         |              |                    |                    | 0 to +140 °C<br>1 mbar to 4 bar  |
| Storage temperature                          | -20 to +50°C                                              |              |                    |                    |                                  |
| Dimensions                                   |                                                           |              |                    |                    |                                  |
| Logger with battery                          | 20 x 59 mm (Ø x H)                                        |              | 20 x 63 mm (Ø x H) | 20 x 72 mm (Ø x H) | 22 x 83 mm (Ø x H)               |
| Probe shaft                                  | 3 x 25 mm                                                 | 3 x 115 mm   | 1.5 x 775 mm       |                    | –                                |
| Probe shaft tip                              | –                                                         |              | 3 x 25 mm          |                    | –                                |
| <b>Battery</b>                               |                                                           |              |                    |                    |                                  |
| Battery type                                 | ½ AA lithium                                              |              |                    |                    |                                  |
| Service life                                 | 750 operating hours (measuring cycle 10 seconds at 121°C) |              |                    |                    |                                  |
| Application range                            | -50 to +140°C                                             |              |                    |                    |                                  |

| testo 190 accessories                                                                                                                                                                                                              | Order no. |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| testo 190 small case, case for transport, storage, configuration and readout of testo 190 CFR data loggers. Including USB cable and 1 programming and readout unit for a maximum of 8 data loggers. Dimensions: 340 x 265 x 60 mm. | 0516 1901 |
| testo 190 battery, PEEK coated. For the power supply of all testo 190 models. Application range: -50 to +140°C.                                                                                                                    | 0515 1901 |
| testo 190 freeze-drying probe holder (puck) for more precise measurement of surface temperature with the testo 190-T3 and testo 190-T4.                                                                                            | 0554 1907 |
| Retaining clamps (5 off), to secure the loggers (testo 190-T1/-T2/-T3/-T4) in the application areas (e.g. in autoclaves).                                                                                                          | 0554 0297 |
| Distance adapters short to secure the testo 190-T4 data logger in the programming and readout unit.                                                                                                                                | 0554 0298 |
| Distance adapters long to secure the testo 190-T1, testo 190-T2 and testo 190-T3 data loggers in the programming and readout unit.                                                                                                 | 0554 0299 |
| ISO temperature calibration certificate (testo 190-T1/-T2/-T3/-T4), calibration points -50°C; 0°C; +90°C; +121°C; +140°C                                                                                                           | 0520 0141 |
| DAkkS temperature calibration certificate (testo 190-T1/-T2/-T3/-T4), calibration points -50°C; 0°C; +90°C; +121°C; +140°C                                                                                                         | 0520 0281 |
| ISO pressure calibration certificate (testo 190-P1), calibration points 200 / 1400 / 2600 / 3800 / 5000 mbar                                                                                                                       | 0520 0025 |
| DAkkS pressure calibration certificate (testo 190-P1), calibration points 200 / 800 / 1400 / 2000 / 2600 / 3200 / 3800 / 4400 / 5000 mbar                                                                                          | 0520 0215 |
| GMP compliant IQ /OQ documentation (Basic Package, Guided Service Package or Full Service Package selectable)                                                                                                                      | 0520 9726 |

1981 0254/TT/10.2025

Subject to change, including technical modifications.

