
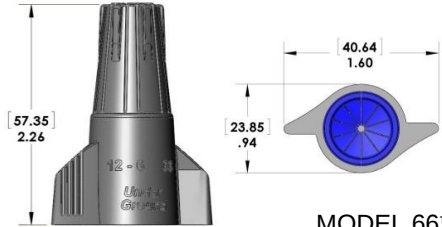


	MODELS 60®, 64® & 66™	UNDERGROUND WIRE CONNECTORS		
FEATURES/BENEFITS:				
	- PRE-FILLED TWIST-ON WIRE CONNECTORS PROVIDE ONE-STEP PROCESS - SILICONE-BASED SEALANT PROTECTS AGAINST MOISTURE & CORROSION IN WET LOCATION APPLICATIONS - LISTED TO UL 486G SEALED TWIST-ON WIRE CONNECTOR - FOR USE IN DAMP/WET LOCATIONS OR DIRECT BURIAL/BELOW-GRADE APPLICATIONS			
ELECTRICAL:				
VOLTAGE: MODEL 60® MODEL 64® MODEL 66®		600 V MAX* 600 V MAX* 600 V MAX* *SIGNS/FIXTURES 1000V		
PHYSICAL:		STANDARDS & SPECIFICATIONS:		
HOUSING: THERMOPLASTIC POLYESTER INSERT: STEEL PLATING: ZINC TEMPERATURE: 105 C (221 F) SEALANT 100% SILICONE		UL 486C UL 486G SEALED TWIST-ON WIRE CONNECTOR UL 94V-2 FLAME RATING CSA- C22.2 NO. 188 CSA- C22.2 NO. 198.2 FOR DIRECT BURIAL RoHS COMPLIANT		
WIRE RANGE: - Solid and/or stranded wire combinations unless stated otherwise - Consult factory for numerous other combinations not listed				
MODEL 60®	MODEL 64®	MODEL 66™		
STRIP LENGTH: 1/2" (12,7mm)	STRIP LENGTH: 5/8" (15,9mm)	STRIP LENGTH: 1" (25,4mm)		
1 to 2 #10 1 to 3 #12 1 to 4 #14 2 #16 2 #18 1 #10 w/ 2 #12 1 #20 w/ 1 #18	1 to 3 #10 1 to 3 #12 2 to 5 #14 2 to 4 #16 2 to 4 #18 solid 3 or 4 #20 solid 3 or 4 #22 solid	1 to 2 #6 2 to 3 #8 2 to 5 #10 3 to 6 #12 1 #6 w/ 1 to 2 #8 2 #6 w/ 1 #10 or 1 #12 or 1 #14 2 #8 w/ 1 or 2 #10		
DIMENSIONS:				
Length = 1.68 in (42,7 mm) Diameter = 0.65 in (16,5 mm) Wingspan = 0.85 in (21,7 mm) MODEL 60® IMAGE NOT AVAILABLE	 51.8 2.04 23 Ø .90 MODEL 64®	 57.35 2.26 40.64 1.60 23.85 .94 MODEL 66™		
ORDERING INFO:				
CATALOG # 30-1260 30-1264 30-1066	MODEL 60® 64® 66™	COLOR Gray/Gray Gray/Dk. Blue Gray/Dk. Blue	PACKAGE TYPE: Box of 100 Box of 50 Box of 50	WEIGHT LBS (KG): 14.4 (6.5) 34.1 (15.5) 5.5 (2,5)
FACTORY CONTACT:		SALES CONTACT:		

Revision: January 7, 2010