IN-SURE® LEVER
WIRE CONNECTORS

IDEAL electrical™

Find Quality Products Online at: Valuetesters.com info@valuetesters.com

IN-SURE® LEVER
WIRE CONNECTORS

Secure Connections | Reusable - Solid and Stranded

Lever wire connectors provide the perfect solution for joining solid and stranded wires. These versatile connectors have a compact design and take up minimal room in junction boxes and enclosures.

- Secure, reliable and reusable
- Releasable connector for solid & stranded wires
- Modern alternative to traditional connectors
- Clear housing allows verification of connection
- Continuity check port and strip length guide
- Compact design for tight spaces
- Models L32, L33 and L35 listed for use with Cu/Cu and Cu/CC combinations
- Models L22, L23 and L25 - Solid wires can be inserted without opening lever

12 AWG Lever Wire Connectors

ORDERING INFORMATION

Model	# of Ports	Amp Rating	Wire Combination	Qty.	Part No.
L22	2	20A	600V* Solid Copper: 24 - 12 AWG (0,25-4mm²) Stranded Copper: 24 - 12 AWG	Box of 150	**30-10L22**
				Jar of 500	**30-50L22J**
				Box of 4,000	**30-16L22**
L23	3			Box of 100	**30-10L23**
				Jar of 350	**30-35L23J**
				Box of 2,500	**30-16L23**
L25	5			Box of 75	**30-10L25**
				Jar of 200	**30-20L25J**
				Box of 1,500	**30-16L25**

*1,000V in signs and fixtures. Temperature rating 105°C max. (221°F).
COPPER-TO-COPPER ONLY. Do not use on aluminum.

10 AWG Lever Wire Connectors

ORDERING INFORMATION

Model	# of Ports	Amp Rating	Wire Combination	Qty.	Part No.
L32	2	30A	600V* Solid Copper: 22-10 AWG (0,5-6mm²) Solid-Copper Clad Aluminum: 12-10 AWG Stranded Copper: 22-10 AWG	Box of 100	**30-10L32**
				Jar of 350	**30-35L32J**
				Box of 1,000	**30-16L32**
L33	3			Box of 75	**30-10L33**
				Jar of 225	**30-25L33J**
				Box of 1,000	**30-16L33**
L35	5			Box of 50	**30-10L35**
				Jar of 125	**30-15L35J**
				Box of 500	**30-16L35**

*1,000V in signs and fixtures. Temperature rating 105°C max. (221°F). Listed for use with Cu-Cu and Cu-CC. DO NOT use with aluminum wire.

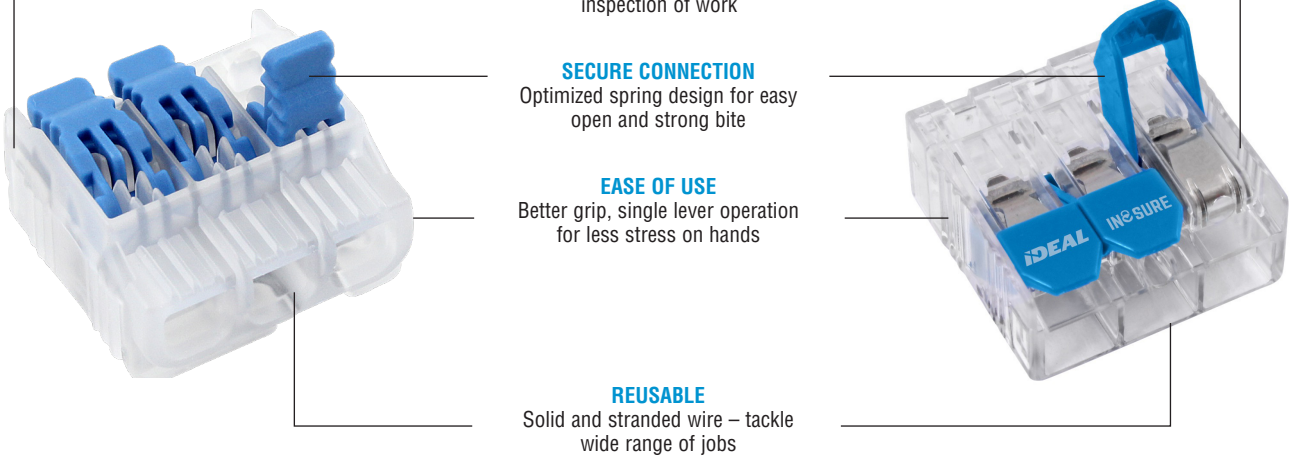

WARNING Improper use or installation of this product may cause fire, electrocution, serious personal injury or death. Shut off power to the circuit or remove fuse before using this product. Use only connectors properly sized to the wiring being used. Consult local building codes for installation requirements.

WARNING:
Cancer and Reproductive Harm: www.P65Warnings.ca.gov.

c UL us LISTED Wire Connector E5238 CE UKCA RoHS COMPLIANT

IDEAL INDUSTRIES, INC.

9/24

Find Quality Products Online at: Valuetesters.com info@valuetesters.com