



STP Stripping System


- The STP automatically adjusts to the size of cable being stripped and readily accepts cable diameters up to a maximum of 0.3125 in. (7.9mm).
- Strip lengths are adjustable in inches or millimeters from a minimum of 1.25 in. to a maximum of 6.00 in. (31.7mm to 152.4mm).
- Cycle times may be completed in as little as six seconds.
- User-friendly keypad emits audible tone and provides tactile feedback.
- Large, easy-to-read display shows program mode, operating functions, input prompts and service message.
- Stores up to 500 batch programs for frequently run jobs in non-volatile memory, optimizing setup and production.
- Password Security System protects against program modification.
- Safety interlock disconnects electrical power if machine is opened during operation.
- Keyed locking mechanism inhibits unauthorized entry into the machine.
- Developed for bench-top use, the STP Stripping System fits on a 24 in. deep workspace.



Ordering Information

| Description | Cat. No. |
|---|----------|
| Shielded Twisted Pair Cable Stripping System w/one set of blades, one set of front and rear gripper pads, power cord, 6 ft. air hose, slug ejector tray, T [®] -Cutter Lite Wire Cutter, keys and operation manual | |
| STP, 115 VAC, 60 Hz 4A | 45-930 |
| STP, 230 VAC, 50 Hz 2A | 45-935 |
| Air Regulator | 45-906 |
| Replacement Blade Set | K-7763 |
| Replacement Front Grip Pad (two required) | LA-2408 |
| Replacement Standard Rear Grip Pad (six required) | LA-2414 |
| Gripper Slug Remover | 45-333 |
| T [®] -Cutter Lite Wire Cutter | 45-260 |
| Mounting Bracket | K-6809 |

Dimensional Information

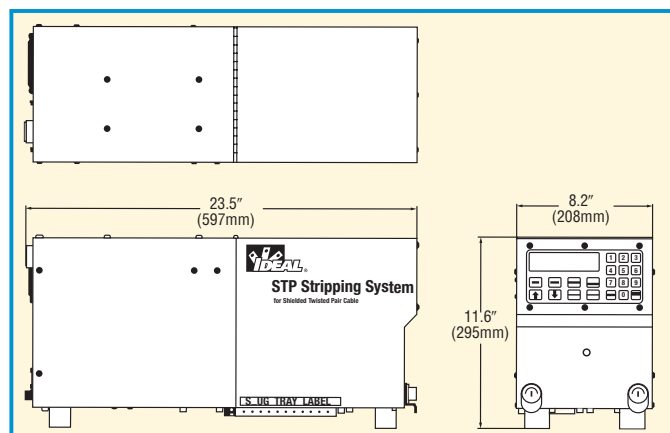

Technical Data

| Technical Data | |
|------------------------------|---|
| Strip Lengths: | Minimum: 1.25 in. (31.7mm) Maximum: 6.00 in. (152.4mm) |
| Strip Diameter Range: | Minimum: 0.06 in. (1.5mm) Maximum: 0.3125 in. (7.9mm) |
| Voltage: | Selectable power supply is equipped with an EIC power line receptacle and can easily switch between 110–120V 60Hz to 220–240V 50Hz. |
| Air Requirements: | Air must be clean, dry and pressure regulated to 100 PSI. An optional air regulator (IDEAL Part No. 45-906) is available. |
| Blade Type: | Thermal/mechanical |
| Dimensions: | Width: 10.5 in. (261mm) Depth: 23.5 in. (597mm) Height: 12.25 in. (318mm) |
| Weight: | 65 lbs. (29.5 Kgs) |
| Warranty: | 1-year limited warranty |

