

Filters

■ Additel 100 Series Filters



ADT100-FLT-1K

1000 psi (70 bar) Pneumatic Filter Specifications

| | |
|-----------------------|---|
| Pressure range | -15 to 1000 psi (-1.0 to 70 bar) |
| Filtering resolution | 0.04 mm |
| Operation temperature | -10°C to 50°C |
| Safety pressure | <1200 psi (83bar) |
| Size | 1.18 dia x 5 in (30 dia x 127 mm) (size will vary based on adapters) |
| Outlet/Inlet port | See ordering information |
| Storage temperature | -20°C to 70°C |
| Material | 304 SS |



ADT100-FLT-10K



10,000 psi (700 bar) Hydraulic Filter Specifications

| | |
|-----------------------|---|
| Pressure range | -15 to 10,000 psi (-1.0 to 700 bar) |
| Filtering resolution | 0.07 mm |
| Operation temperature | -10°C to 50°C |
| Safety pressure | <12,000 psi (827 bar) |
| Size | 0.87 x 0.98 x 4 in (22 x 25 x 100 mm) (size will vary based on adapters) |
| Outlet/Inlet port | Comes with removable male and removable female adapter |
| Storage temperature | -20°C to 70°C |
| Material | 304 SS |



Note: The estimated End of Life (EOL) expectancy for all hoses and filters (pneumatic and hydraulic) is approximately 10 years and should be replaced at the first sign of wear or damage.

ORDERING INFORMATION

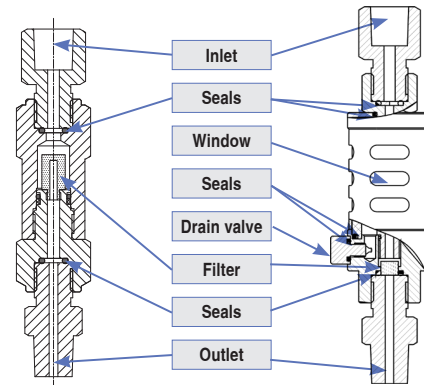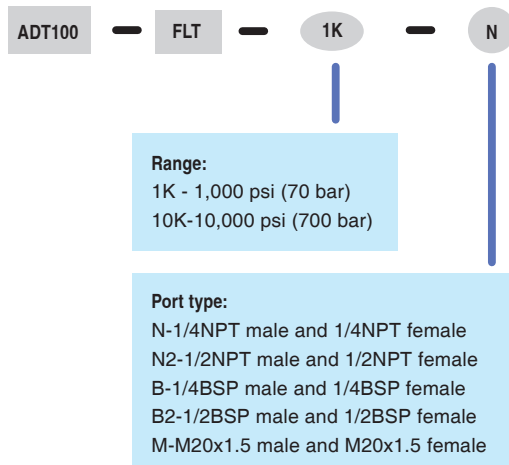

ADT100-FLT-10K

ADT100-FLT-1K