



## PRODUCT CONFIGURATION

### PRODUCT IDENTIFIER **1**

**DP490** = Insertion Meter for 1.5 to 36" (40-900 mm)

**DP525** = Insertion Meter for 2 to 100" (50-2500 mm) suitable for "hot-tap" installations (valve not included)

### BODY MATERIAL **2**

**S** = 316 Stainless Steel

### ROTOR/SHAFT MATERIALS **3**

**2** = PVDF/316 stainless steel (260°F [120°C])

**3** = PEEK/tungsten carbide (300°F [150°C])

### O-RING MATERIAL **4**

**1** = Viton™ 5°F to + 300°F (-15°C - + 150°C)

**4** = Buna-N (Nitrile), -40°F to + 260°F (-40°C to + 125°C)

### TEMPERATURE RATING **5**

**2** = 260° F (125° C) max. (available with electrical connections 5 & 6)

**3** = 300° F (150° C) max. (only available with rotor/shaft type 3, pick-up type 2, electrical connection type 5, & Viton™ O-Ring)

**5** = 212° F (100° C) max. (standard temperature rating)

### PROCESS CONNECTIONS **6**

**1** = 1-1/2" BSPT male thread

**2** = 1-1/2" NPT male thread

**3** = 2" BSPT male thread

**4** = 2" NPT male thread

### PICK-UP TYPE **7**

**1** = NPN open collector & voltage pulse (standard)

**2** = NPN open collector only

**3** = Reed switch only (not suitable for Temp code 3)

**9** = Quadrature pulse output (requires F15 option for bi-directional flow capability)

### ELECTRICAL CONNECTIONS **8**

**C** = Flying cable (5 ft [1.5 m] on DP490, 3 ft [1 m] on DP525)

**2** = Flying cable - 33 ft (10 m)

**5** = Terminal box on stem kit - IP67

**6** = Stem kit 3/8" NPT x M16 thread (required for integral instruments)

## DP SERIES INSERTION IMPELLER METERS

**FLOMEC® Insertion Meters** are cost effective stainless steel meters for measuring the flow of water, fuels and other low viscosity liquids in pipe sizes 1.5" – 100" (10 – 2500 mm). Insertion Meters are a flexible, economic method to measure large flow rates with small pressure drops and low installation costs, with most applications battery powered with a FLOMEC totalizer. Applications include HVAC, hot and cold water, fire systems, water distribution (management and treatment), boiler feed water, waste water and hydrant flow testing.

## FEATURES / BENEFITS

- IP68 (NEMA6) submersible 316SS construction (cable connection only)
- Intrinsically safe option available
- DP525 version suitable for "hot tap" installations
- Quadrature pulse option available for bi-directional flow measurement

### INTEGRAL OPTIONS **9**

\_\_\_ =

**R4** = RT40 backlit rate totalizer in Aluminum housing

**R5** = RT14 backlit rate totalizer with 4-20mA and pulse outputs, in GRN housing

**R6** = RT14 IECEx/ATEX Intrinsically Safe rate totalizer with 4-20mA and pulse outputs, in GRN housing (requires pick-up type 3)

**R7** = RT40 backlit rate totalizer in GRN housing

**F15** = F115 bi-directional flow rate totalizer, 4-20mA and pulse outputs, HART communications

**F18** = F018 backlit rate totalizer, 4-20mA and pulse outputs, HART communications

**F19** = F018 Intrinsically Safe backlit rate totalizer, 4-20mA and pulse outputs, Hart communications (requires pick-up type 3)

### CALIBRATION (for integral display models only) **10**

\_\_\_ = Display in Litres (DEFAULT)

**G** = Displays in US Gallons

1 2 3 4 5 6 7 8 9 10  
---->>> DP490 S 2 1 5 - 1 1 6 R5

## SPECIFICATIONS

|                        | DP490                                                                | DP525                      |
|------------------------|----------------------------------------------------------------------|----------------------------|
| Suits Pipe Sizes       | 1.5 - 35" (40-900 mm)                                                | 2 - 100" (50-2500 mm)      |
| Pipe Connection        | 1.5" or 2" BSPT or NPT male thread                                   | 2" BSPT or NPT male thread |
| Flow Velocity Range    | 3 - 33 ft/sec (1 -10 m/s)                                            |                            |
| Linearity % of Reading | Typically ± 1.5%                                                     |                            |
| Temperature Range:     | -40°F to 300°F (-40°C to 150°C)                                      |                            |
| Max. Pressure:         | 1160 psi (80 bar)                                                    |                            |
| Materials              | 316SS body and rotor shaft                                           |                            |
| Protection Class:      | IP68 (NEMA 6), optional I.S (Intrinsically Safe)<br>Integral options |                            |
| Pulse Outputs          |                                                                      |                            |
| Hall Effect            | 3 wire open collector, 5-24v (dc), 20mA max. Nom 0 -240Hz            |                            |
| Reed*                  | 30v (dc), 200mA max. Nom 0 - 80Hz                                    |                            |
| Voltage Pulse          | Self Generated voltage, Nom 0 - 240Hz                                |                            |
| Non-Magnetic Sensor    | 3 wire open collector, 5 - 24V (dc), 20mA max. Nom 0 - 240Hz         |                            |
| Optional Outputs**     | 4-20mA, scaled pulse, quadrature pulse                               |                            |


\*Reed Switch resolution is 1/3 of the NPN Hall Effect or Voltage Pulse outputs

\*\*Optional Integral option is required

| Flying Cable Option | DP490                 | DP525           |
|---------------------|-----------------------|-----------------|
| A- Thread           | 1.5" or 2" BSP or NPT | 2" BSP or NPT   |
| A - Dimension       | 2.36" (60 mm)         | 2.52" (64 mm)   |
| B                   | 7.8" (198 mm)         | 17.48" (444 mm) |
| C                   | 1.5" (38 mm)          | 2.28" (58 mm)   |
| D                   | 9.33" (237 mm)        | 16.69" (424 mm) |

| Integral Option | DP490                 | DP525             |
|-----------------|-----------------------|-------------------|
| A- Thread       | 1.5" or 2" BSP or NPT | 2" BSP or NPT     |
| A - Dimension   | 2.36" (60 mm)         | 2.52" (64 mm)     |
| B               | 7.8" (198 mm)         | 17.48" (444 mm)   |
| C               | 1.5" (38 mm)          | 2.28" (58 mm)     |
| D - RT12/RT14   | 16.34" (415 mm)       | 35.43 in (900 mm) |
| D - RT40        | 14.96" (380 mm)       | 34.06" (865 mm)   |
| D - F018/F115   | 16.26" (413 mm)       | 35.35" (898 mm)   |
| E - RT12/RT14   | 0.47" (122 mm)        |                   |
| E - RT40        | 4.45" (113 mm)        |                   |
| E - F018/F115   | 5.12" (130 mm)        |                   |
| F - RT12/RT14   | 2.40" (61 mm)         |                   |
| F - RT40        | 2.48" (63 mm)         |                   |
| F - F018/F115   | 2.95" (75 mm)         |                   |

## DIMENSIONS

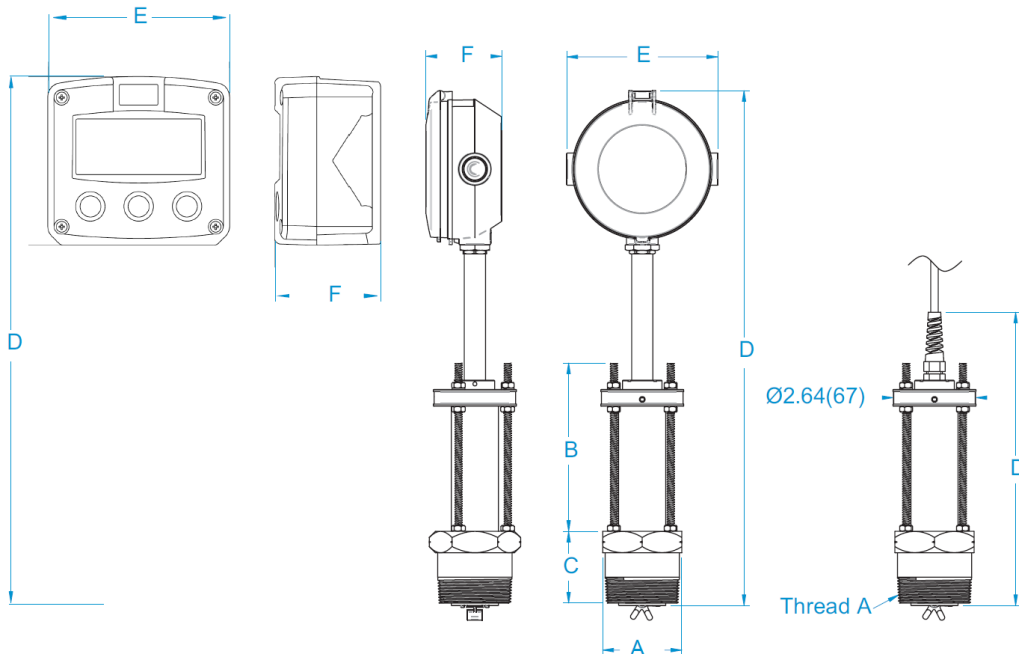

## APPLICATIONS

- HVAC
- Hot and Cold Water
- Fire Systems
- Water Distribution (Management and Treatment)
- Boiler Feed Water
- Waste Water
- Hydrant Flow Testing

**Service & Warranty:** For technical assistance, warranty replacement or repair contact your **FLOMEC®** or **GPI®** distributor: In North or South America: **888-996-3837 / FLOMEC.net**  
Outside North or South America: **+61 2 9540 4433 / FLOMEC.net**

Wichita · Sydney

GREAT PLAINS INDUSTRIES

