




Made in Canada

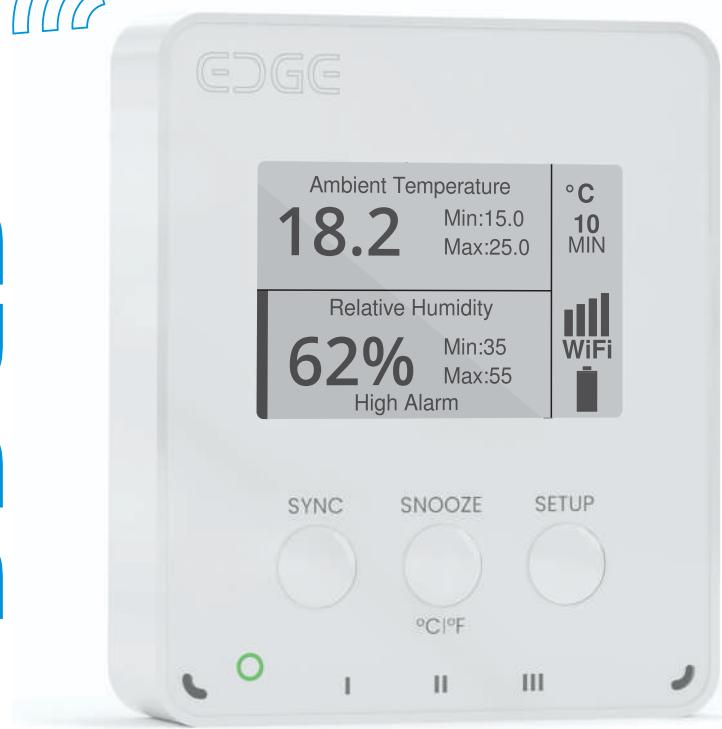

### Reliable Ambient Monitoring with Smart Alerts and Mold Risk Detection

The EDGE Essential is purpose-built for accurate ambient temperature and humidity monitoring in preservation-sensitive environments such as museums, archives, storage spaces, offices, server rooms, and residential or commercial buildings. With optional door and flood sensors, mold risk notifications, and seamless WiFi or cellular connectivity, it enables early detection of unfavorable conditions and supports long-term environmental tracking for mold prevention, utility consumption audits, and usage analysis across agricultural, residential, and commercial settings. Tool-free installation, adjustable sampling intervals, and a powerful cloud platform make EDGE Essential a dependable solution for everyday monitoring without the complexity of external probes or certification requirements.



BLE WiFi Cellular

### Sensors & Monitoring



Ambient Temperature



Relative Humidity



Power Disruption



Digital Input



Mold Index



Location  
Cellular Only

- Integrated Ambient Temperature and Relative Humidity Sensor.
- **Calculates:** Feels Like Temperature, Dew Point, Vapor Pressure (VP), Vapor Pressure Deficit (VPD), and Mold Index
- One (1) Digital Input (Dry Contact) for Door Magnet or Flood Sensor.
- Up to 2 years battery life (4 x AA replaceable Alkaline)

### Real-time Alarms

- High & Low Temperature and Humidity alarms.
- Power Interruption and Restoration Alarms.
- Flood Detection, Door Magnet or Dry contact Real-Time Alarms.
- Mold Index Calculation and Mold risk Warnings.



EN-June 2025

## EDGE's Special Features

### Advanced Monitoring, Alarms, and Seamless Connectivity

Connects directly to WiFi or Cellular (No gateway required)  
Alarms via Email, SMS, Phone Call  
Power Disruption and Re-connection Notification  
Audible and Visual alarms  
Real-time BLE streaming  
Automatic WiFi-to-cellular rollover (in Cellular model)  
Works on 4xAA batteries (up to 2 years) or USB-C power  
Super user-friendly setup with QR scan

## LoggerFlex Cloud Platform

### Powerful Web App with Compliance-Built Features

Continuous recording at short, adjustable intervals  
Comprehensive reports including Min/Max and Peak Points  
Specialized VPD reporting for agricultural monitoring  
Data consolidation and analysis across multiple devices  
Tamper-proof activity logs with time-stamped alarm  
Interactive graphs and long-term trend analysis  
Geographical device management via map view  
Accessible on both mobile and desktop devices  
Team collaboration with role-based access control

## Display & Interface

Graphical e-paper screen shows:

- Real-time data
- Active alarms
- Battery, Connection and power status

Audible and visual alarms directly on device.

## Connectivity

WiFi for continuous cloud sync and Real-time alarms  
BLE for smooth real-time data broadcast  
Cellular with automatic WiFi failover. (Cellular model)

## Technical Specifications

Built in sensors	Temperature and Relative Humidity (RH)	
Operation Temperature range	°C	-20 to +70
	°F	-4 to +160
Temperature Measurement Accuracy		±0.2 °C (±0.36 °F)
Temperature Reporting Resolution		0.1
RH measurement range		0-99% non-condensing
RH Measurement Accuracy		±1.8% RH (at 25 °C, 10-90%)
Interface		Wi-Fi - IEEE 802.11 b/g/n - 2.4 GHz BLE (Bluetooth Low Energy) - 2.4 GHz Cellular LTE-M & 2G (all band - Global) *
FCC ID	WiFi	2AC7Z-ESPWROOM32
	Cellular	2AJYU-8VC0001
Power Supply	Internal	4 x AA batteries
	External	5V DC Standard USB-Charger
Display Update Temperature Range	°C	0 to +50
Out of this range, display updates are paused	°F	+32 to +122
Internal Memory Capacity		49,000 Record of each measured Parameter
Recording interval		1 to 30 minutes
Syncing interval (sending data to the cloud)		Real-time Alarms - 10 minutes to 7 days

\* Cellular model - with global e-sim



Made in Canada