

PG SERIES

Rugged Stainless Steel Construction



Versatile

A wide operating temperature range of -40 to 85 °C (-40 to 185 °F) for operation versatility

Sturdy construction

Suitable for high shock and vibration applications

Fewer parts to fail Rugged

No silicon oil, no internal O-rings, no welds

Stainless steel wetted construction

The PG Series pressure transducers are compatible with a variety of HVAC and industrial applications, such as refrigeration measurement, pneumatic pressure measurement, gas pressure measurement, pump inlet, and outlet fluid pressure. They are also compatible with extreme applications, such as aerospace and motor sports equipment.

Volt and mA output options ensure integration with building systems. A wide selection of pressure ranges offers application flexibility.

The PG Series offers a stainless steel housing and all models are warranted for a period of five years.

APPLICATIONS

- Pump inlet/outlet and compressors
- Hydraulic/pneumatic systems
- Energy and water management
- Refrigeration equipment, fluids
- Gas pressure measurement

SPECIFICATIONS

GENERAL

Supply Voltage	Class 2; 12 to 30 Vdc
Output	0 to 5 Vdc (3-wire), 0 to 10 Vdc (3-wire) or 4 to 20 mA (2-wire)
Load Impedance	Volt models >10 kΩ mA models ≤250 Ω with 12 Vdc min. supply voltage mA models ≤500 Ω with 17 Vdc min. supply voltage
Standard Connection	Cable gland 59" (1.5 m) length
Pressure Port	1/4" NPT Male

Humidity 0 to 95% RH non-condensing

WARRANTY

Limited Warranty 5 years

AGENCY APPROVALS



* Accuracy includes nonlinearity and hysteresis.

PERFORMANCE AT 25 °C (77 °F)

Accuracy *	±0.5% FS
Media Compatibility	Fluids & gases compatible with 316L stainless steel
Pressure Cycles	>100 million cycles
Over Pressure	2.5x FS with no change in calibration

ENVIRONMENTAL

Shock	100G, 11 msec, 1/2 sine
Vibration	20G peak, 20 to 2400 Hz
EMI/RFI Protection	Yes
Rating	IP66
Operating Temp. Range	-30 to 120 °C (-22 to 248 °F)
Compensated Temp Range	0 to 55 °C (32 to 130 °F)
Total Error Band Over Temp	<±3% of FS



800.354.8556 | +1 503.598.4564 | sales@veris.com | intl@veris.com | veris.com

H00001830.I 0321

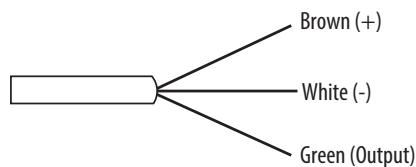
Find Quality Products Online at:

Value[®]testers.com


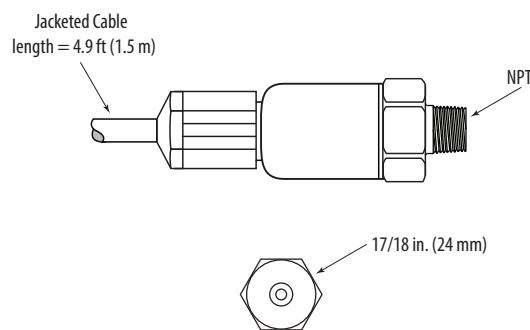
info@valuetesters.com

3-WIRE, 0-5 VDC/0-10 VDC

Wire Color Coding

**2-WIRE, 4 TO 20 MA**

Wire Color Coding

**DIMENSIONAL DRAWING****ORDERING INFORMATION**

PG	Range	Wetted Material	Output
	<input type="checkbox"/>	<input type="checkbox"/> A	<input type="checkbox"/>
	03 = 0 to 15 psig	= 316L stainless steel	M = 4 to 20 mA
	04 = 0 to 25 psig		V = 0-10 Vdc
	05 = 0 to 50 psig		J = 0-5 Vdc
	06 = 0 to 75 psig		
	07 = 0 to 100 psig		
	08 = 0 to 250 psig		
	09 = 0 to 500 psig		

Call factory for ranges not shown.

Example:
PG 07 A V

ACCESSORIES

Brass Snubber, 1/4" NPT (AA69)
 Stainless Steel Snubber, 1/4" NPT (AA70)
 Pigtail Steam Siphon (AA13)



AA69



AA70



AA13