
PLF Series

Magnetic Float Level Switch Assembly



- Up to 8 Switching Points
- Excellent Chemical Resistance
- No Power Required



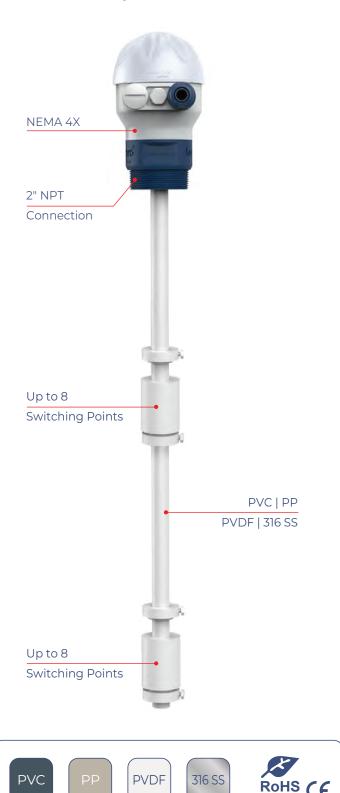


- Superior Chemical Resistance
- Easy Installation
- All Plastic Design No Metal to Corrode
- Suitable for Non-Coating Acids | Bases
- NEMA 4X Enclosure
- Cord Grip Included
- Easy In-Field Wiring Termination

Precision Liquid Level Detection for Industrial Excellence

The LevelPro® PLF provides liquid level detection up to 8' (2.4m) with 1-8 different level switch points.

The PLF Series comes standard with a heavy duty, compact junction box for easy wiring termination.

The PLF level switch package is an excellent high | low level indicator for a variety of industrial applications including; day tanks, process skids or machines, cooling towers or process tank applications, and can be connected directly to a valve, alarm, pump etc.

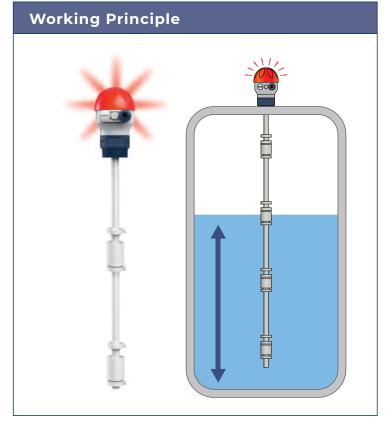



PLF Series Magnetic Float Level Switch Assembly



Technical Specifications

General				
Operating Range	0 - 8 ft	0 - 2.4 m		
Connection	2" NPT	2" NPT		
Accuracy	±2 mm	±2 mm		
Hysteresis	8 mm			
Materials				
Sensor Body	PVC PP PVDF 316 SS	PVC PP PVDF 316 SS		
O-Rings	N/A	N/A		
Enclosure	Glass Filled Polypropylene	Glass Filled Polypropylene NEMA 4X IP67		
Cable Glands	PP	рр		
Electrical				
Voltage Rating	Minimum Switching Capac	ity 60VAC 9VDC	Maximum Switching Capacity 120VAC 36VDC	
Operating Temperature				
PVC	32°F to 140°F		0°C to 60°C	
PP	-4°F to 190°F		-20°C to 88°C	
PVDF	-40°F to 221°F		-40°C to 105°C	
316 SS	-40°F to 221°F		-40°C to 105°C	
			* Non Freezing Liquids	
Standards & Approvals				
CE FCC				
RoHS Compliant				

Model Selection SP4 SP5 L5 SP6 SP7 L7 L8 L4 L6 SP8 1: NO 1: NO 1: NO 1: NO 1: NO 2: NC 2: NC 2: NC 2: NC 2: NC L1 PLF - 2 - 4 - 1 - ?? - 1 - ?? - 1 - ?? - 1 - ?? - 1 L3 - ?? - 1 L4 + 15 Switching Position (SP1) # of Contact Material Length (L1) L2 SP3 SP2 Ĺ7 + 1 | 2 | 3 | 4 | 5 6 | 7 | 8 2: PVC 1: NO 1: NO Length 1: NO 3: PP 2: NC 2: NC 2: NC 5: PVDF inches 8: 316 SS