


NOTICE:

As a result of a temporary parts shortage, the 4-position slide switch used for range selection has been replaced with a 5-position slide switch in a limited period of production runs. See pages 3-4 for details.



PW2xxxS

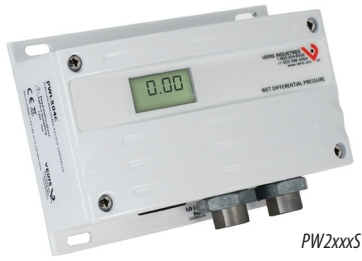

PW2xxxBP

PW2 Series

Wet Media Differential Pressure Transducer

Product Overview

The PW2 Series sensor is designed to accept high differential pressure. Install the sensor on a duct or pipe across a pump, filter, heat exchanger, compressor, or other non-corrosive wet media. The dual sensor design eliminates the need for a bypass valve, and the bi-directional capability reduces installation errors. A pushbutton allows easy zero adjustment.

Product Identification

	Local Display	NIST	Operational Range*	Options
PW2	☐	☐	☐	☐
	L = LCD Display X = No Display	N = NIST X = None	03 = 0 to 50 psig 04 = 0 to 100 psig 05 = 0 to 250 psig	S = Standard BP = With mounted bypass assembly

* IMPORTANT!

Select operational range according to maximum gauge pressure, NOT differential pressure.
Example: High gauge pressure=90 psig, select 100 psig model (04).



NOTICE

- This product is not intended for life or safety applications.
- Do not install this product in hazardous or classified locations.
- Read and understand the instructions before installing this product.
- Turn off all power supplying equipment before working on it.
- The installer is responsible for conformance to all applicable codes.

If this product is used in a manner not specified by the manufacturer, the protection provided by the product may be impaired. No responsibility is assumed by the manufacturer for any consequences arising out of the use of this material.

Specifications

Media Compatibility	17-4 PH stainless steel
Input Power	Class 2; 12 to 24 Vdc, loop powered (polarity insensitive)
Output	2-wire transmitter; 4 to 20 mA (clipped and capped)
Proof Pressure	2x max. F.S. range
Burst Pressure	5x max. F.S. range
Accuracy at 25 °C*	Ranges A, B, C: $\pm 1\%$ F.S.** Range D: $\pm 2\%$ F.S.**
Surge Damping	Electronic; 5-second averaging
Temperature Compensated Range	0 to 50 °C (32 to 122 °F); TC Zero <1.5% of product F.S. per sensor TC Span <1.5% of product F.S. per sensor
Sensor Operating Range	-20 to 85 °C (-4 to 185 °F)
Long Term Stability	$\pm 0.25\%$ per year
Zero Adjust	Pushbutton auto-zero
Operating Environment	-10 to 55 °C (14 to 131 °F); 10 to 90% RH non-condensing
Fittings	1/8" NPT female thread, stainless steel 17-4 PH
Physical	White powder-coated aluminum
PRESSURE RANGES	
0 to 50 psi (0 to 3.45 bar)	5/10/25/50 psid (0 to 0.34/0.69/1.72/3.45 bar)
0 to 100 psi (0 to 6.89 bar)	10/20/50/100 psid (0 to 0.69/1.38/3.45/6.89 bar)

Specifications (cont.)


0 to 250 (0 to 17.24 bar)	25/50/125/250 psid (0 to 1.72/3.45/8.62/17.24 bar)
----------------------------------	--

Note: To conform to EMC standards, use shielded cabling. Technical information is available from the factory on request.


** Accuracy combines linearity, hysteresis, and repeatability.
** F.S. is defined as full span of selected range in bidirectional mode.*

Dimensions

PW2xxxS

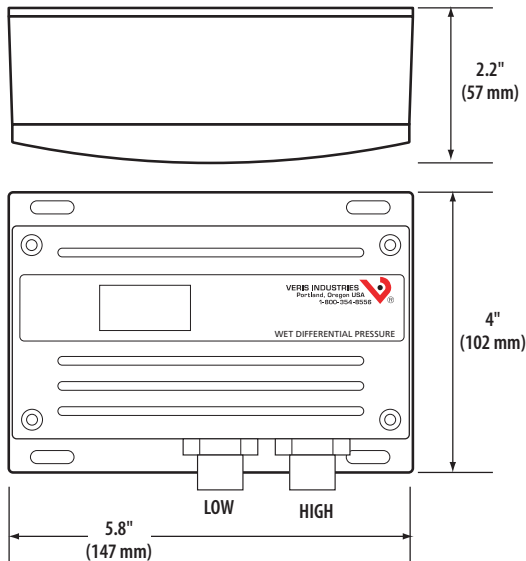

PW2xxxBP

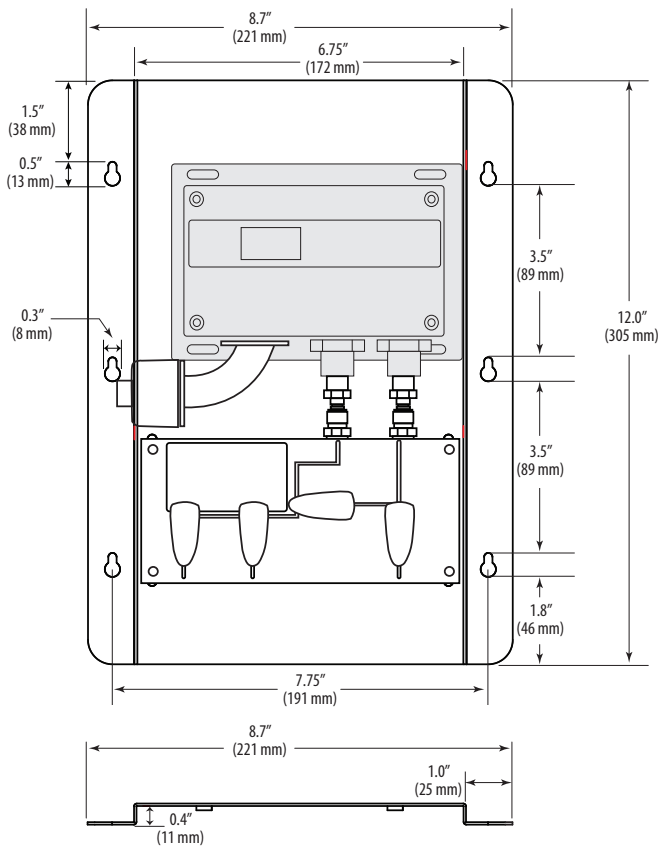


Installation



ATTENTION

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC SENSITIVE DEVICES TO AVOID DAMAGE TO THE CIRCUITRY THAT IS NOT COVERED UNDER FACTORY WARRANTY.

1. Mount sensor on a duct or pipe, across the pump, filter, or other pressure differential.
2. Wire as shown below.
3. Configure the jumpers as described below.

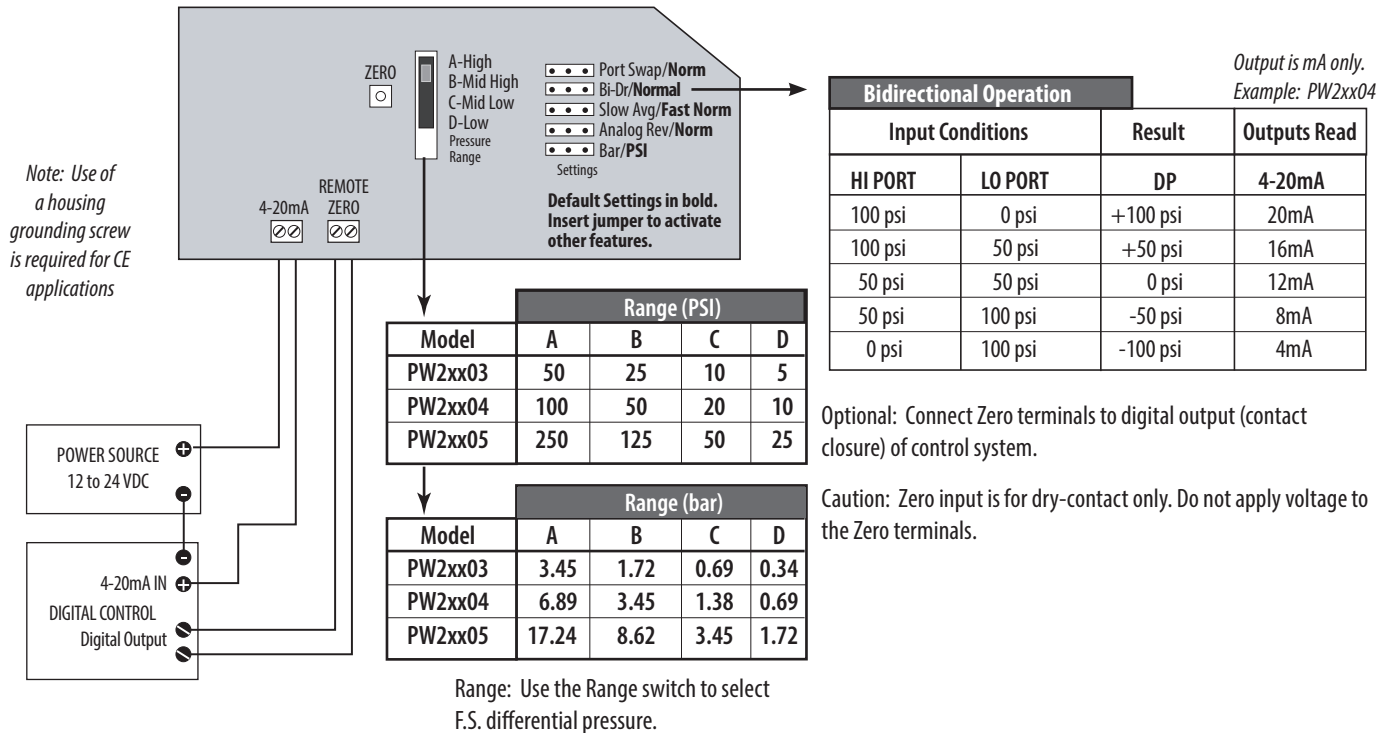

Jumper	Notes
Port Swap/Norm	Reverses polarity of the pressure ports (i.e. makes the LO port operate as the HI port and vice versa); used when the sensor is incorrectly plumbed.
Bi-Dr/Normal	Normal: 0 to F.S. pressure Bidirectional: -F.S. pressure to +F.S. pressure; output reads 1/2 when pressure is zero.
Slow Avg/Fast Norm	Slow mode provides 5-second averaging for surge damping.
Analog Rev/Norm	Normal: Output increases as pressure increases; Reverse: Output is maximum when pressure differential is zero and decreases as pressure increases.
Bar/PSI	Select output units.

NOTICE:

As a result of a temporary parts shortage, the 4-position slide switch used for range selection has been replaced with a 5-position slide switch in a limited period of production runs. This will have a minor impact on how the range selection works on the affected models. The 5-position switch will be used in models produced between these dates:

