

## EasyView™ Type K Single Input Thermometer




### Large dual LCD display and Memory function

Simultaneously displays current temperature and Max, Min, or Avg readings. Manually store and recall up to 150 readings for further analysis.

### Features:

- Compact and rugged design with high contrast large LCD display
- Manually store/recall up to 150 readings
- Wide temperature range with 0.1°/1° resolution
- Data Hold function freezes reading on display
- Records Max/Min/Avg readings for later recall
- Offset key used for zero function to make relative measurements
- Auto Power off with disable feature
- Low battery and overrange indication
- Complete with built-in stand, protective holster, general purpose Type K bead wire temperature probe (-4 to 482°F/-20 to 250°C) and 6 AAA batteries

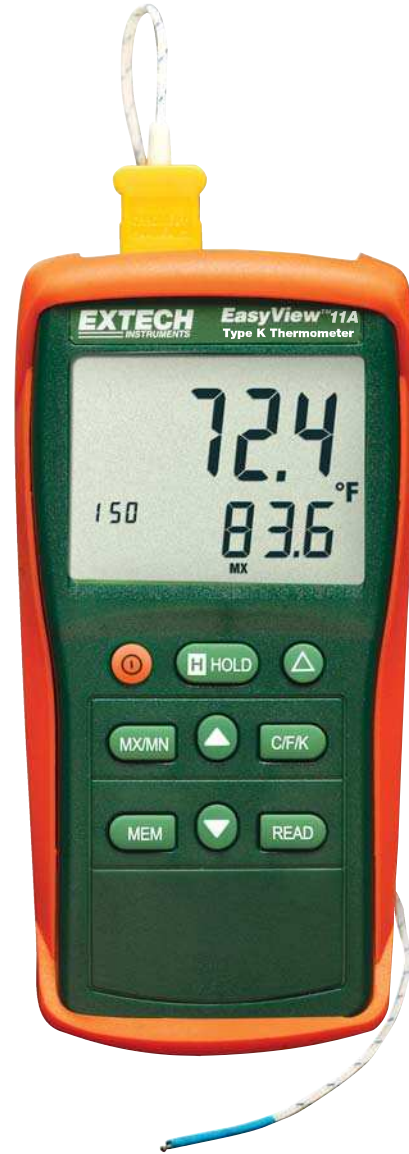

TP875



TP200

### Optional Accessories:

Model TP875 — Optional Type K Bead Wire Temperature Probe measures from -58 to 1000°F (-50 to 538°C) with subminiature connector. Includes a banana adaptor connector for use with meters with banana adaptor inputs.

Model TP200 — Optional Type K Pipe Clamp Temperature Probe for hands-free superheat/sub-cooling temperature measurement from -4°F to 200°F (-20°C to 93°C)

Visit [www.extech.com](http://www.extech.com) for a wide selection of Temperature Probes including Penetration and Surface Probes.

Specifications	
Temperature (Type K)	-58 to 1999°F (-50 to 1300°C)
Basic Accuracy	±(0.3%rdg +2°F); ±(0.3%rdg +1°C)
Resolution	0.1°/1°
Memory	Manual store/recall up to 150 readings
Dimensions	5.9 x 2.8 x 1.3" (150 x 72 x 35mm)
Weight	8.3oz (235g)

### Ordering Information:

- EA11A .....EasyView™ Type K Single Input Thermometer
- EA11A-NIST ..EasyView™ Type K Single Input Thermometer w/ Calibration Traceable to NIST
- TP870 .....Type K Bead Wire Temperature Probe (482°F/250°C)
- TP875 .....Type K Bead Wire Temperature Probe (1000°F/538°C)
- TP200 .....Type K Pipe Clamp Probe (200°F/93°C)
- 409996 .....Soft Vinyl Pouch Carrying case

Distributed by:  
**Valuetesters.com**  
 sales@valuetesters.com  
 Tel: 602-795-8292, Fax: 602-795-4624

